



Patent  
Attorney's Docket No. 030662-063

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT  
APPLICATION TRANSMITTAL LETTER



Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Enclosed for filing is the utility patent application of Yoji ITO for ELLIPSOIDAL POLARIZING PLATE COMPRISING TWO OPTICALLY ANISOTROPIC LAYERS AND POLARIZING MEMBRANE.

Also enclosed are:

- ☒ 2 sheet(s) of ☒ formal ☐ informal drawing(s);
- ☒ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 is ☐ hereby made to \_  
filed in \_ on \_;  
☒ in the declaration;
- ☐ a certified copy of the priority document;
- ☐ a General Authorization for Petitions for Extensions of Time and Payment of Fees;
- ☐ \_\_\_\_\_ statement(s) claiming small entity status;
- ☒ an Assignment document;
- ☐ an Information Disclosure Statement; and
- ☐ Other: \_\_\_\_\_
- ☒ An ☒ executed ☐ unexecuted declaration of the inventor(s)  
☒ also is enclosed ☐ will follow.
- ☐ Please amend the specification by inserting before the first line the sentence --This application claims priority under 35 U.S.C. §§119 and/or 365 to \_ filed in \_ on \_; the entire content of which is hereby incorporated by reference.--
- ☐ A bibliographic data entry sheet is enclosed.



21839

☒ The filing fee has been calculated as follows ☐ and in accordance with the enclosed preliminary amendment:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$690.00 (101)
Total Claims	10	MINUS 20 =	0	x \$18.00 (103)	0
Independent Claims	2	MINUS 3 =	0	x \$78.00 (102)	0
If multiple dependent claims are presented, add \$260.00 (104)					0
Total Application Fee					\$690.00
If verified Statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					0
Add Assignment Recording Fee if Assignment document is enclosed					\$40.00
<b>TOTAL APPLICATION FEE DUE</b>					<b>\$730.00</b>

- ☐ This application is being filed without a filing fee. Issuance of a Notice to File Missing Parts of Application is respectfully requested.
- ☒ A check in the amount of \$ 730.00 is enclosed for the fee due.
- ☐ Charge \$ \_\_\_\_\_ to Deposit Account No. 02-4800 for the fee due.
- ☒ The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in duplicate.

Please address all correspondence concerning the present application to:

Platon N. Mandros  
Burns, Doane, Swecker & Mathis, L.L.P.  
P.O. Box 1404  
Alexandria, Virginia 22313-1404.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: September 28, 2000

By:

Platon N. Mandros  
Registration No. 22,124

P.O. Box 1404  
Alexandria, Virginia 22313-1404  
(703) 836-6620

003250 "043430

## 5

## 10

In place of the stretched birefringent film, an optical compensatory sheet comprising an optically anisotropic

layer on a transparent substrate has been proposed. The optically anisotropic layer is formed by aligning liquid crystal molecules and fixing the aligned molecules. Since the liquid crystal molecules usually have large birefringence, an optical compensatory sheet obtained by using the liquid crystal molecules has a specific optical characteristic that cannot be obtained by the conventional stretched birefringent film. The optical compensatory sheet for a TN mode comprising discotic liquid crystal molecules is disclosed in Japanese Patent Provisional Publication No. 6(1994)-214116, US Patent Nos. 5,583,679, 5,646,703 and German Patent Publication No. 3,911,620A1, and the one comprising rod-like liquid crystal molecules is disclosed in Japanese Patent Provisional Publication No. 7(1995)-35924.

#### SUMMARY OF THE INVENTION

An object of the present invention is to provide an ellipsoidal polarizing plate suitable for a liquid crystal display of TN mode.

The present invention provides an ellipsoidal polarizing plate comprising a first optically anisotropic layer, a second optically anisotropic layer, a polarizing membrane and a transparent protective film, wherein the first optically anisotropic layer has an angel of  $5^{\circ}$  to  $85^{\circ}$  between the direction giving the maximum refractive index and the layer plane, and wherein the second optically anisotropic layer is optically positive and uniaxial, and the second optically anisotropic layer has an angel of  $0^{\circ}$  to  $5^{\circ}$  between the direction giving the maximum refractive index and the layer plane.

The invention also provides a liquid crystal display comprising a liquid crystal cell of TN mode and two polarizing elements arranged on both sides of the liquid crystal cell, wherein at least one of the polarizing elements is an

ellipsoidal polarizing plate comprising a first optically anisotropic layer, a second optically anisotropic layer, a polarizing membrane and a transparent protective film, wherein the first optically anisotropic layer has an angel  
5 of  $5^{\circ}$  to  $85^{\circ}$  between the direction giving the maximum refractive index and the layer plane, and wherein the second optically anisotropic layer is optically positive and uni-axial, and the second optically anisotropic layer has an angel of  $0^{\circ}$  to  $5^{\circ}$  between the direction giving the maximum  
10 refractive index and the layer plane.

In the present specification, the term "essentially perpendicular" means that the noticed angle is within the range of  $90^{\circ} \pm 20^{\circ}$ . The angle is preferably within the range of  $90^{\circ} \pm 16^{\circ}$ , more preferably within the range of  $90^{\circ} \pm 12^{\circ}$ ,  
15 further preferably within the range of  $90^{\circ} \pm 8^{\circ}$ , and most preferably within the range of  $90^{\circ} \pm 4^{\circ}$ .

The term "essentially parallel" means that the noticed angle is within the range of  $0^{\circ} \pm 20^{\circ}$ . The angle is preferably within the range of  $0^{\circ} \pm 16^{\circ}$ , more preferably within the range of  $0^{\circ} \pm 12^{\circ}$ , further preferably within the range of  
20  $0^{\circ} \pm 8^{\circ}$ , and most preferably within the range of  $0^{\circ} \pm 4^{\circ}$ .

#### BRIEF DESCRIPTION OF THE DRAWINGS

25 Fig. 1 schematically illustrates a basic structure of a liquid crystal display of TN mode.

Fig. 2 schematically illustrates another basic structure of a liquid crystal display of TN mode.

Fig. 3 schematically illustrates a further basic  
30 structure of a liquid crystal display of TN mode.

#### DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 schematically illustrates a basic structure of  
35 a liquid crystal display of TN mode.

The display shown in Fig. 1 comprises a transparent protective film (1a), a polarizing membrane (2a), a second optically anisotropic layer (3a), a first optically anisotropic layer (4a), a lower substrate of liquid crystal cell (5a), rod-like liquid crystal molecules (6), an upper substrate of liquid crystal cell (5b), another first optically anisotropic layer (4b), another second optically anisotropic layer (3b), another polarizing membrane (2b) and another transparent protective film (1b), piled up in this order from the side of a back light (BL).

In the structure shown in Fig. 1, the set of the lower substrate of liquid crystal cell, the rod-like liquid crystal molecules and the upper substrate of liquid crystal cell (the set of 5a-6-5b) constitutes a liquid crystal cell of TN mode. Each set of the first and second optically anisotropic layers (each set of 3a-4a and 4b-3b) constitutes an optical compensatory sheet. Each set of the transparent protective film, the polarizing membrane and the first and second optically anisotropic layers (each set of 1a-2a-3a-4a and 4b-3b-2b-1b) constitutes an ellipsoidal polarizing plate.

Fig. 2 schematically illustrates another basic structure of a liquid crystal display of TN mode.

The display shown in Fig. 2 comprises a transparent protective film (1a), a polarizing membrane (2a), a second optically anisotropic layer (3a), a first optically anisotropic layer (4a), a lower substrate of liquid crystal cell (5a), rod-like liquid crystal molecules (6), an upper substrate of liquid crystal cell (5b), another transparent protective film (1b), another polarizing membrane (2b) and a third transparent protective film (1c), piled up in this order from the side of a back light (BL).

In the structure shown in Fig. 2, the set of the lower substrate of liquid crystal cell, the rod-like liquid crystal molecules and the upper substrate of liquid crystal

5

structure of a liquid crystal display of TN mode.

10

20

30



anisotropic layer, the polarizing membrane and the transparent protective film in this order.

[First optically anisotropic layer]

5        In the first optically anisotropic layer, the angle between the direction giving the maximum refractive index and the layer plane is within the range of  $5^\circ$  to  $85^\circ$ .


003260 0494960  
10        The first optically anisotropic layer can be formed from liquid crystal molecules or from a polymer film. The layer is preferably formed from rod-like liquid crystal molecules oriented in inclined alignment or from a polymer film stretched in an inclined direction. The layer is more preferably formed from the rod-like liquid crystal molecules. In the case where the rod-like liquid crystal  
15        molecules are homogeneously aligned, the major axes of the molecules correspond to the direction giving the maximum refractive index. Therefore, when the first optically anisotropic layer is formed from the rod-like liquid crystal molecules, the liquid crystal molecules are aligned so  
20        that the average inclined angle (the average angle between the liquid crystal molecules and the layer plane) may be in the range of  $5^\circ$  to  $85^\circ$ . The inclined angle of each rod-like liquid crystal molecule preferably varies according to the distances between the molecule and the surface of the  
25        second optically anisotropic layer.

Preferred examples of the rod-like liquid crystal molecules include azomethines, azoxy molecules, cyanobiphenyls, cyanophenyl esters, benzoic esters, phenyl cyclohexanecarbonate esters, cyanophenylcyclohexanes, cyano-substituted phenylpyrimidines, alkoxy-substituted phenylpyrimidines, phenyldioxanes, tolans and alkenylcyclohexylbenzonitriles. Further, some metal complexes are included in the rod-like liquid crystal molecules.

35        Descriptions of the rod-like liquid crystal molecules are found in "Kagaku-Sosetsu, Ekisho no Kageku" (written in


Japanese), vol. 22 (1994), Chapters 4, 7 and 11; and  
 "Ekisho Devise Handbook" (written in Japanese), chapter 3.

The rod-like liquid crystal molecules preferably have  
 a refractive index of birefringence in the range of 0.001  
 5 to 0.7. The rod-like liquid crystal molecule preferably  
 has a polymerizable group. Examples of the polymerizable  
 groups (Q) are shown below.








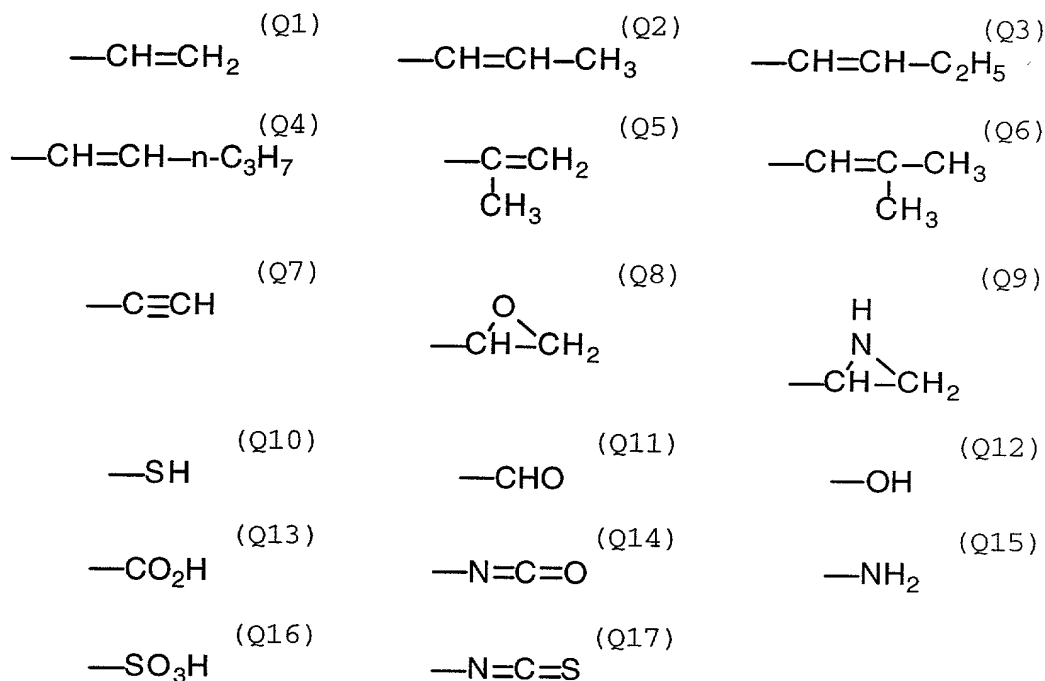



The polymerizable group (Q) preferably is an unsatu-  
 10 rated polymerizable group (Q1 to Q7), an epoxy group (Q8)  
 or an aziridinyl group (Q9), more preferably is an unsatu-  
 rated polymerizable group, and most preferably is an  
 ethylenically unsaturated group (Q1 to Q6).

Examples of the polymerizable rod-like liquid crystal  
 15 molecule are shown below.

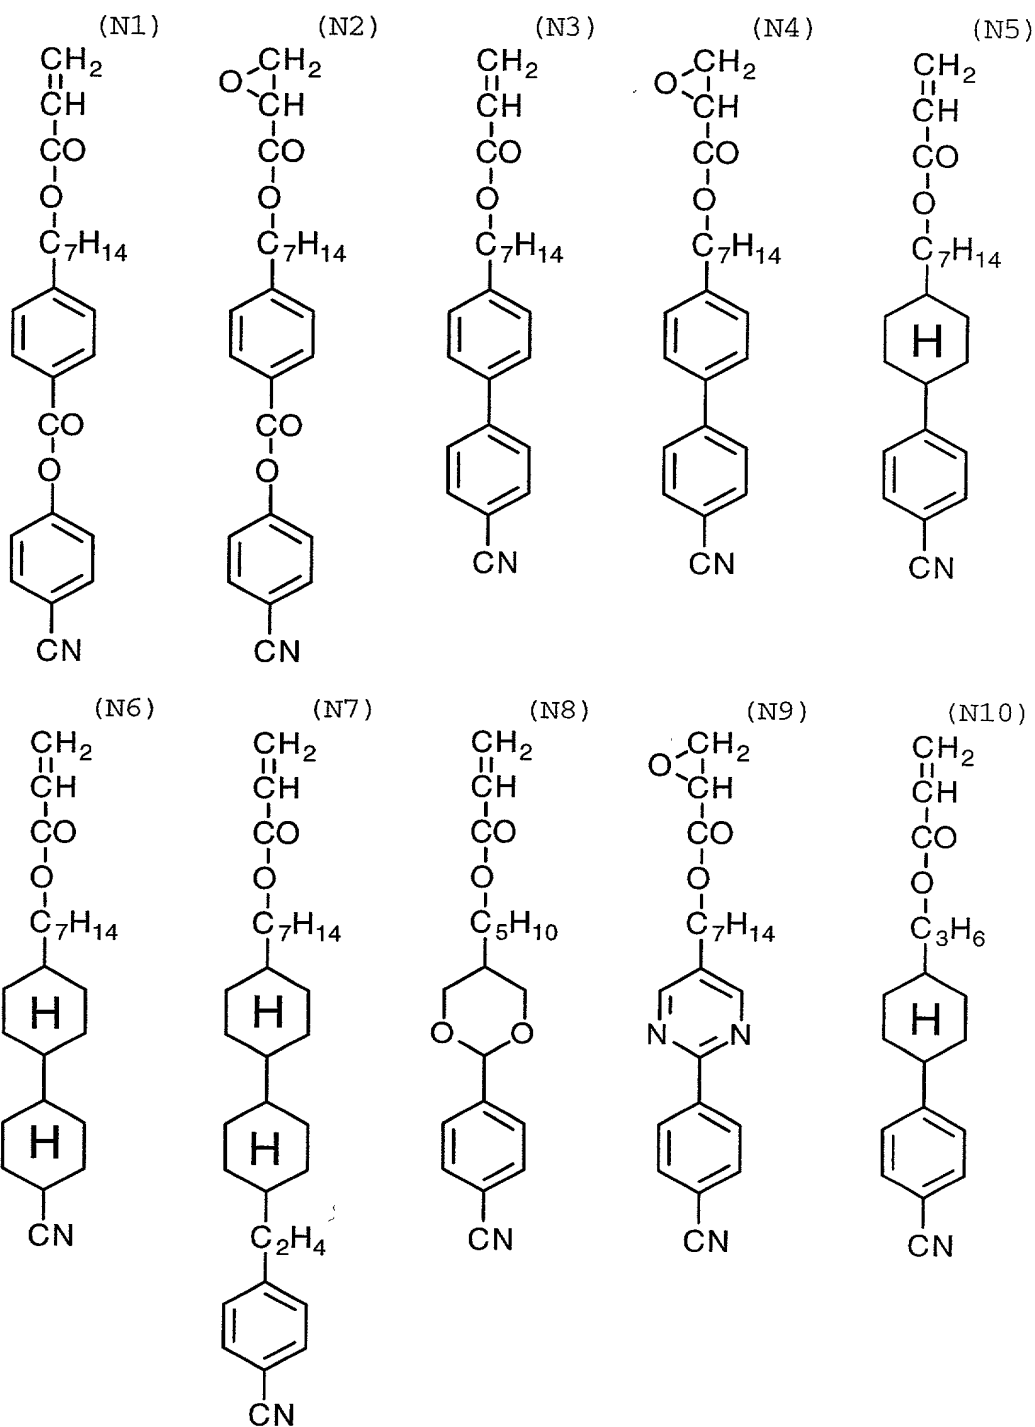


000000 " 07974960

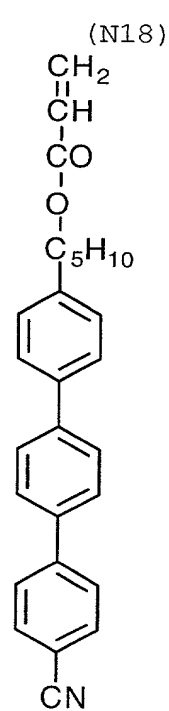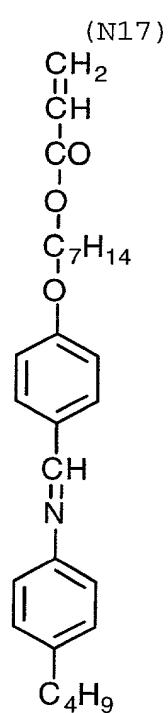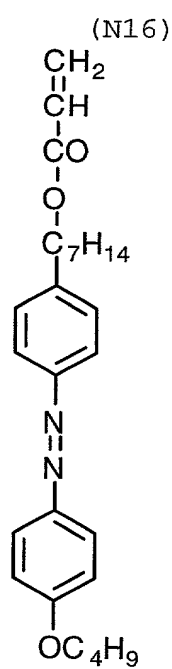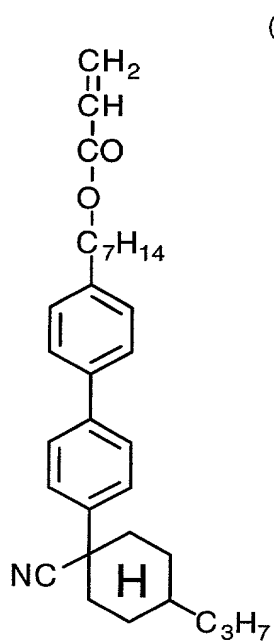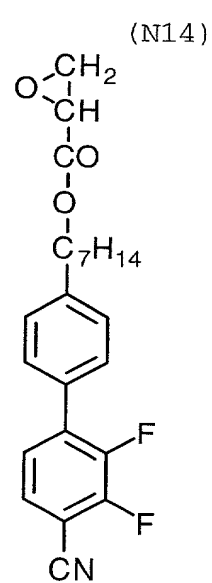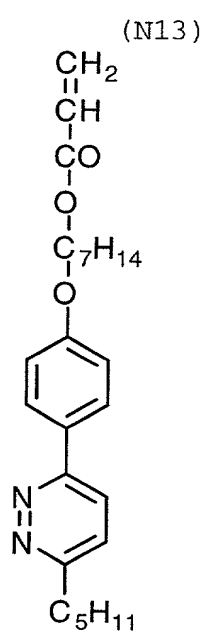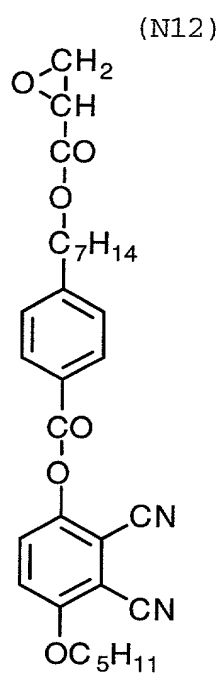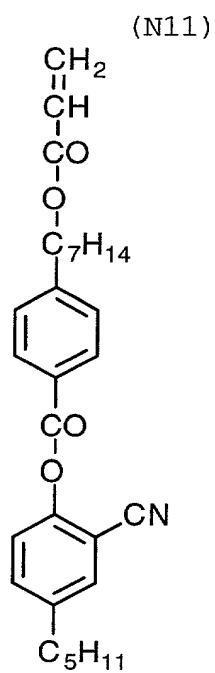

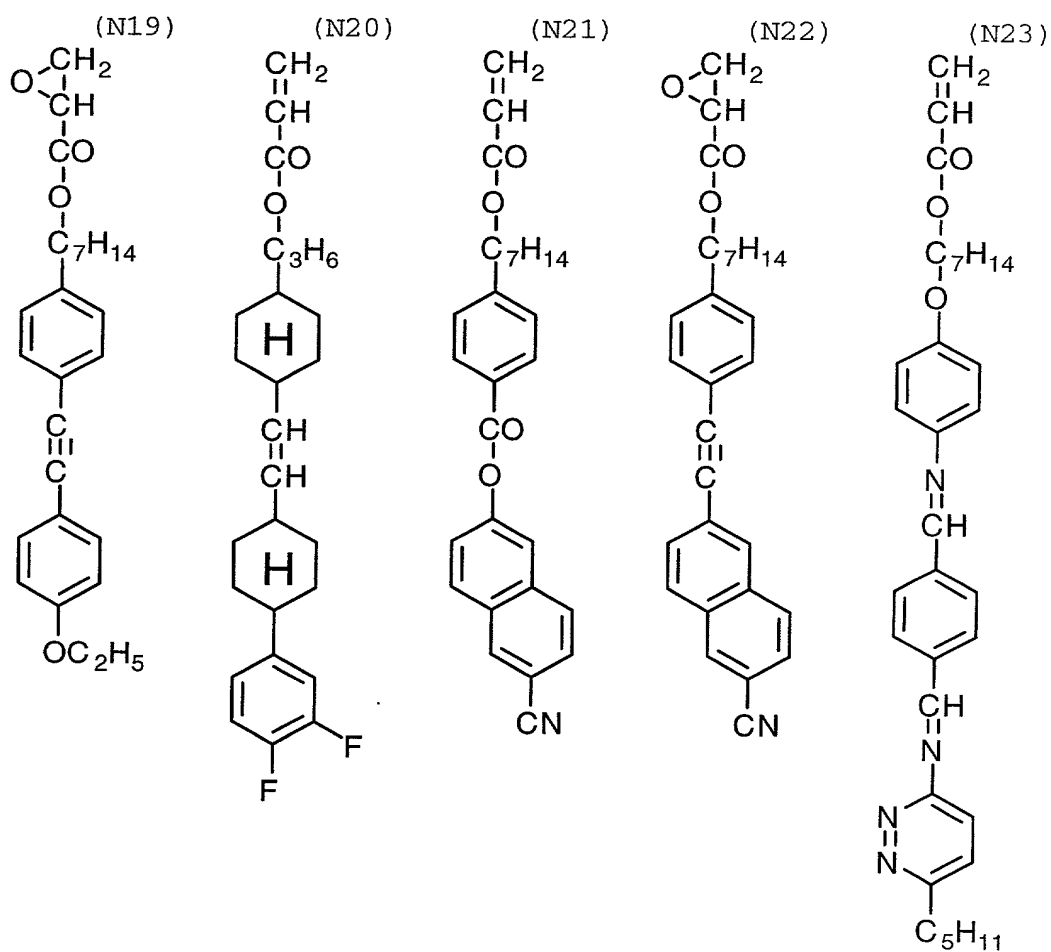


000000 000000 000000



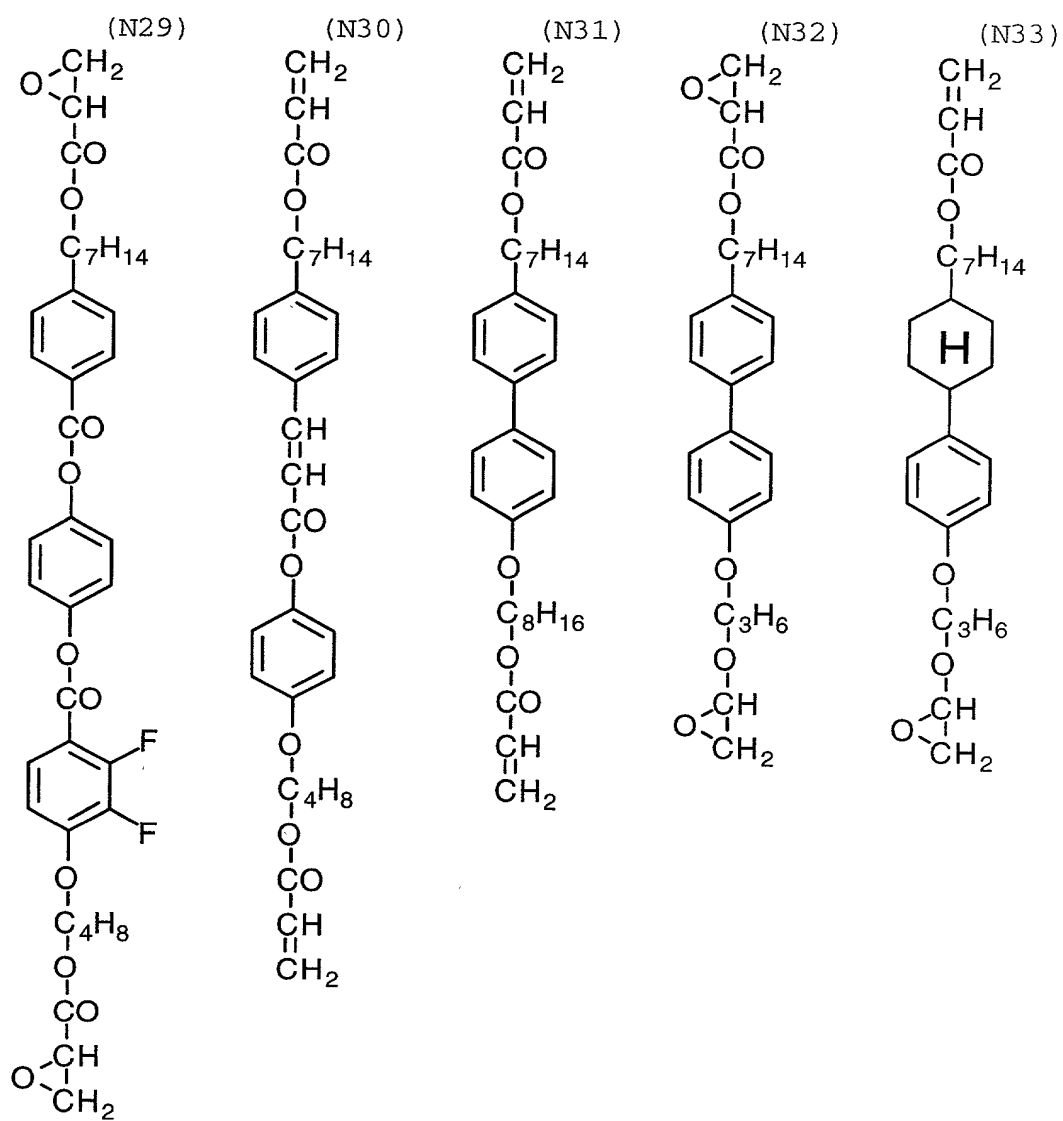


003250 02972950


(N34)




(N35)




(N36)



(N37)



(N38)

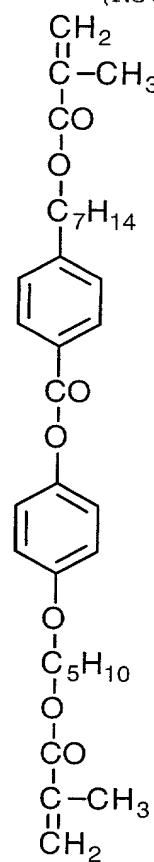


003250" 02972960







(N42)

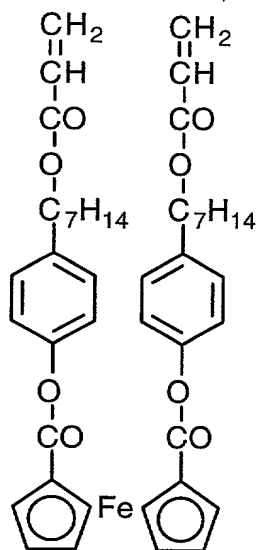


(N43)

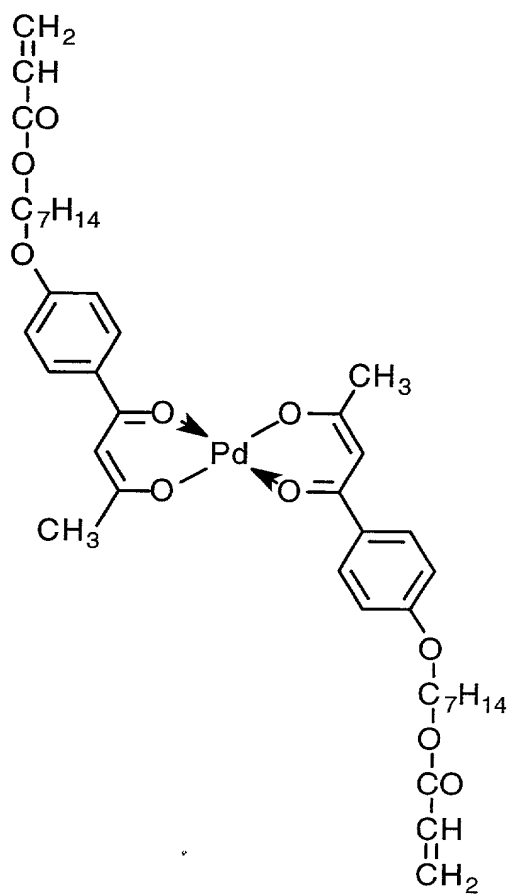


(N44)

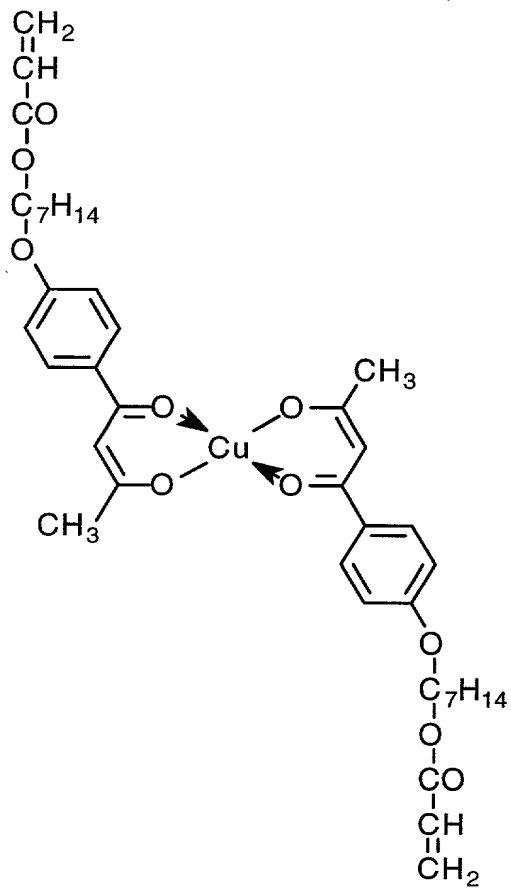

(N45)

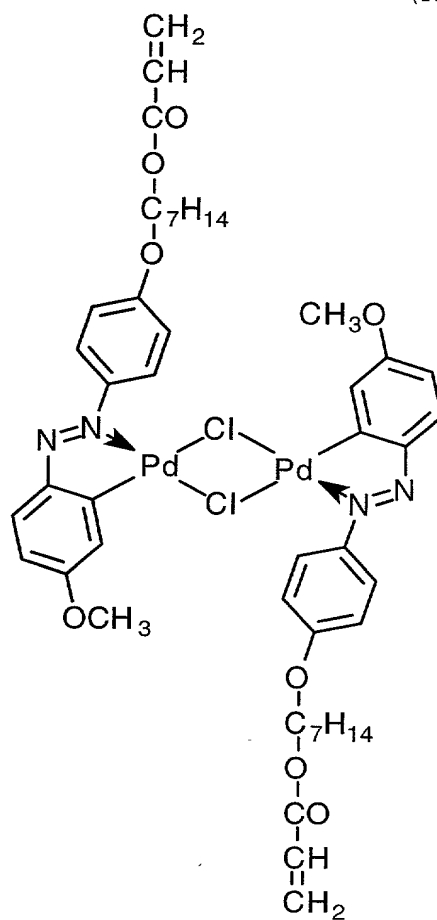


(N46)

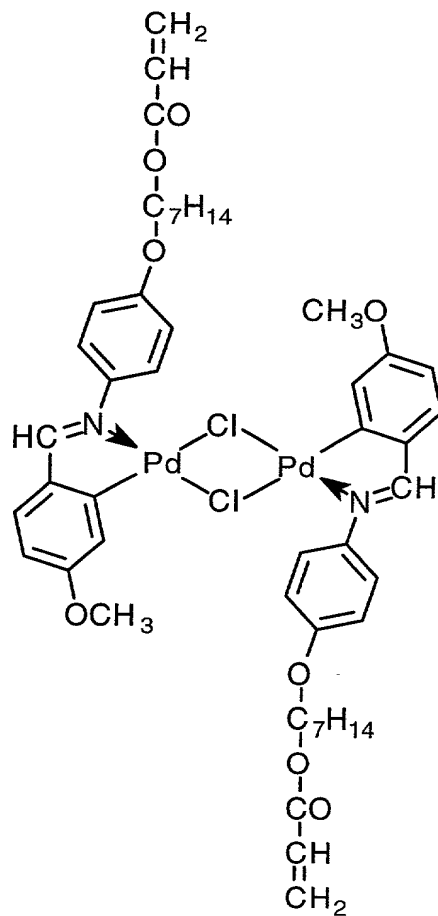

003250 0494950

(N47)

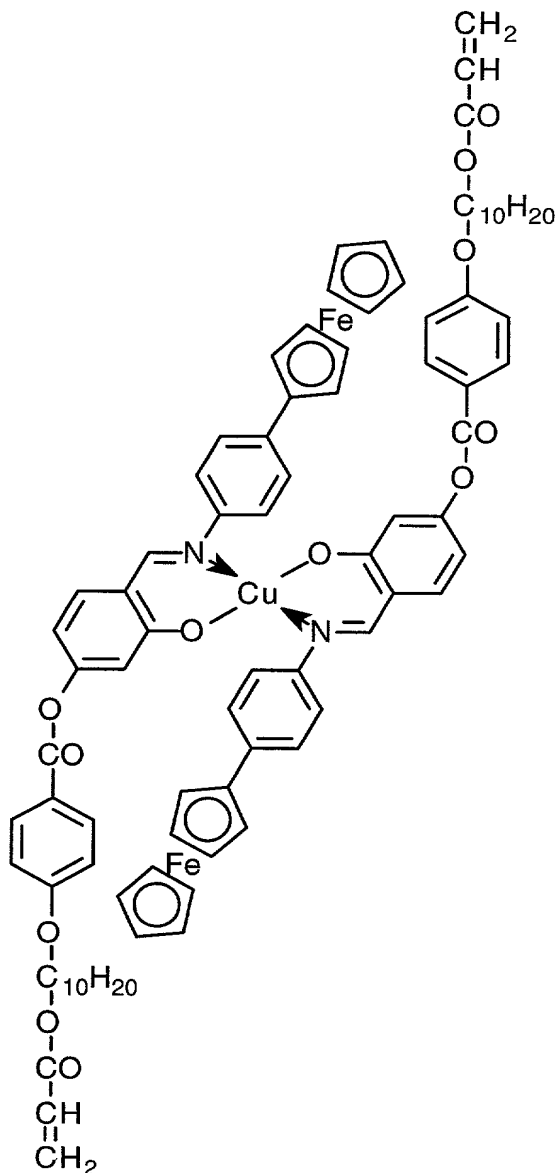

Two or more rod-like liquid crystal molecules can be used in combination. For example, polymerizable rod-like liquid crystal molecules can be used in combination with  
 5 non-polymerizable rod-like liquid crystal molecules.

The first optically anisotropic layer is formed by coating an orientation layer with a liquid crystal composi-

tion (coating solution) comprising the rod-like liquid crystal molecules, a polymerization initiator described below and other optional additives (e.g., plasticizer, monomer, surface active agent, cellulose ester). Organic solvents are preferably used for preparing the liquid crystal composition. Examples of the organic solvents include an amide (e.g., dimethylformamide), a sulfoxide (e.g., dimethylsulfoxide), a heterocyclic compound (e.g., pyridine), a hydrocarbon (e.g., benzene, hexane), an alkyl halide (e.g., chloroform, dichloromethane), an ester (e.g., methyl acetate, butyl acetate), a ketone (e.g., acetone, methyl ethyl ketone) and an ether (e.g., tetrahydrofuran, 1,2-dimethoxyethane). Alkyl halide and ketone are preferred. Two or more organic solvents can be used in combination.

The composition can be coated according to a conventional coating method (e.g., wire bar coating method, extrusion coating method, direct gravure coating method, reverse gravure coating method, die coating method).

It is preferred that the rod-like liquid crystal molecules be homogeneously aligned, and more preferably they are fixed while keeping the alignment. Further preferably, the homogeneously aligned rod-like liquid crystal molecules are fixed by a polymerization reaction. The polymerization reaction can be classified into a thermal reaction using a thermal polymerization initiator and a photo reaction using a photo polymerization initiator. A photo polymerization reaction is preferred.

Examples of the photo polymerization initiators include  $\alpha$ -carbonyl compounds (described in U.S. Patent Nos. 2,367,661, 2,367,670), acyloin ethers (described in U.S. Patent No. 2,448,828),  $\alpha$ -hydrocarbon substituted acyloin compounds (described in U.S. Patent No. 2,722,512), polycyclic quinone compounds (described in U.S. Patent Nos. 2,951,758, 3,046,127), combinations of triarylimidazoles and p-aminophenyl ketones (described in U.S. Patent No.

3,549,367), acridine or phenazine compounds (described in Japanese Patent Provisional Publication No. 60(1985)-105667 and U.S. Patent No. 4,239,850) and oxadiazole compounds (described in U.S. Patent No. 4,212,970).

5       The amount of the photo polymerization initiator is preferably in the range of 0.01 to 20 wt.%, and more preferably in the range of 0.5 to 5 wt.% based on the solid content of the coating liquid.

10       The light irradiation for the photo polymerization is preferably conducted by an ultraviolet ray. The exposure energy is preferably in the range of 20 to 50,000 mJ, and more preferably in the range of 100 to 800 mJ. The light irradiation can be conducted while heating the layer to accelerate the photo polymerization reaction.

15       The first optically anisotropic layer has a thickness preferably in the range of 0.1 to 20  $\mu\text{m}$ , more preferably in the range of 0.5 to 15  $\mu\text{m}$ , and most preferably in the range of 1 to 10  $\mu\text{m}$ .

20       [Second optically anisotropic layer]

      The second optically anisotropic layer is so optically positive uniaxial that the angel between the direction giving the maximum refractive index and the layer plane is within the range of  $0^\circ$  to  $5^\circ$ .

25       Preferably, the projection of the direction giving the maximum refractive index in the first optically anisotropic layer onto the layer plane is essentially perpendicular, on the same plane, to the direction giving the maximum refractive index in the second optically anisotropic layer.

30       The second optically anisotropic layer can be formed from horizontally aligned rod-like liquid crystal molecules or from a horizontally stretched polymer film. It is preferred that the layer be formed from a stretched, particularly uniaxially stretched polymer film.

003260-0797950

Examples of the polymer generally used for forming the second optically anisotropic layer include cellulose ester (e.g., cellulose acetate) and synthetic polymer (e.g., polycarbonate, polysulfone, polyethersulfone, polyacrylate, polymethacrylate, norbornene resin). Preferably, the second optically anisotropic layer is formed from a cellulose ester film, a polycarbonate film or a norbornene resin film, and particularly preferably formed from a cellulose ester film.

It is generally known that a cellulose ester film has high optical isotropy (a cellulose ester film is generally known to have low retardation). However, a cellulose ester film having high retardation (i.e., an optically anisotropic cellulose ester film) can be obtained by the method described in European Patent No. 091165656A2, in which the optically anisotropic cellulose ester film is prepared (1) by a retardation increasing agent, (2) by lowering the acetylation degree in the cellulose acetate film, or (3) by the cold dissolution process.

The polymer film is preferably prepared according to a solvent casting method.

The prepared polymer film is generally stretched to obtain optical anisotropy. In detail, through the uniaxial stretching process, the polymer film can be made optically positive uniaxial and the direction of the maximum refractive index can be made essentially parallel to the layer plane.

The uniaxial stretching process is preferably conducted along the longitudinal (spreading) direction of the film. Further, along the direction perpendicular to the uniaxially stretched direction (along the lateral direction if the film is uniaxially stretched along the spreading direction), weak stretching process (i.e., unbalance biaxial stretching process) may be conducted.



The second optically anisotropic layer of polymer film has a thickness in the range of preferably 20 to 500  $\mu\text{m}$ , more preferably 50 to 200  $\mu\text{m}$ .

For improving the adhesion between the second optically anisotropic layer of polymer film and the layer provided thereon (an adhesive layer, the orientation layer or the first optically anisotropic layer), the surface of the second optically anisotropic layer can be subjected to surface treatment (e.g., glow discharge treatment, corona discharge treatment, UV treatment or flame treatment). Further, on the second optically anisotropic layer, an adhesive (undercoating) layer may be provided.

In the case where the second optically anisotropic layer is formed from rod-like liquid crystal molecules, the layer is preferably provided on a transparent support (or on an orientation layer provided on the support). As the support, a cellulose ester film is preferably used.

In the case where the second optically anisotropic layer is formed from rod-like liquid crystal molecules, the average inclined angle of the liquid crystal molecules (the average angle between the liquid crystal molecules and the layer plane) is within the range of  $0^\circ$  to  $5^\circ$ . Except the average inclined angle, the conditions of the liquid crystal molecules are the same as those described for the first optically anisotropic layer.

The second optically anisotropic layer formed from the rod-like liquid crystal molecules has a thickness of preferably 0.1 to 20  $\mu\text{m}$ , more preferably 0.5 to 15  $\mu\text{m}$ , most preferably 1 to 10  $\mu\text{m}$ .

[Orientation layer]

The rod-like liquid crystal molecules of the first or second optically anisotropic layer are aligned by an orientation layer.

- 5       The orientation layer can be formed by rubbing treatment of an organic compound (preferably a polymer), oblique evaporation of an inorganic compound, formation of a micro groove layer, or stimulation of an organic compound (e.g.,  $\omega$ -tricosanoic acid, dioctadecylmethylammonium chloride, methyl stearate) according to a Langmuir-Blodgett method.
- 10       Further, the aligning function of the orientation layer can be activated by applying an electric or magnetic field to the layer or irradiating the layer with light. The orientation layer is preferably formed by rubbing a polymer.
- 15       The rubbing treatment can be conducted by rubbing a layer containing the aforementioned polymer with paper or cloth several times along a certain direction.

- 20       As the polymer for the orientation layer, a polymer which does not lower the surface energy of the layer (i.e., a polymer generally used for the orientation layer) is preferably used.

The orientation layer has a thickness of preferably 0.01 to 5  $\mu\text{m}$ , more preferably 0.05 to 1  $\mu\text{m}$ .

- 25       After the rod-like liquid crystal molecules of the first or second optically anisotropic layer are aligned with the orientation layer, the optically anisotropic layer can be transferred onto the second optically anisotropic layer or the support, respectively. The aligned and fixed rod-like liquid crystal molecules can keep the alignment
- 30       without the orientation layer.

[Polarizing membrane]

- 35       The polarizing membrane is an iodine polarizing membrane, a dye polarizing membrane comprising a dichromatic dye or a polyene polarizing membrane. The iodine polariz-

008260 070 092800

ing membrane and the dye polarizing membrane are generally prepared from polyvinyl alcohol films. The transmission (polarizing) axis of the film is perpendicular to the stretched direction.

5       The second optically anisotropic layer and the polarizing membrane are preferably so arranged that the direction giving the maximum refractive index in the second optically anisotropic layer is essentially perpendicular to the transmission axis of the polarizing membrane.

10       The second optically anisotropic layer and the polarizing membrane are also preferably so arranged that the direction giving the maximum refractive index in the second optically anisotropic layer is essentially parallel to the transmission axis of the polarizing membrane.

15       [Transparent protective film]

As the transparent protective film, a polymer film is used. The term "transparent" means that the film has an optical transmittance of not less than 80%.

20       The film is generally a cellulose ester film, preferably a triacetylcellulose film, which is preferably prepared according to the solvent casting method.

The thickness of the film is within preferably 20 to 500  $\mu\text{m}$ , and more preferably 50 to 200  $\mu\text{m}$ .

25       [Liquid crystal display]

The present invention can be applied to liquid crystal displays of various modes. The present invention is particularly effective in a liquid crystal display of TN

30       (Twisted Nematic) mode.

008260" 0/9T/960

EXAMPLE 1

[Formation of second optically anisotropic layer]

5 The cellulose acetate solution consisting of the following components was prepared, and then cast on a drum casting machine to form a cellulose acetate film (dry thickness: 105  $\mu\text{m}$ ).

---

10 Cellulose acetate solution

---

	Cellulose acetate (acetic acid content: 60.9%)	45 weight parts
15	Sumisolve TM165 (Sumitomo Chemical Co., Ltd.)	2.35 weight parts
	Triphenyl phosphate	2.75 weight parts
	Biphenyldiphenyl phosphate	2.20 weight parts
	Methylene chloride	232.75 weight parts
20	Methanol	42.57 weight parts
	n-Butanol	8.50 weight parts

---

25 The prepared film was stretched (real magnification:  $\times 1.6$ ) to form a second optically anisotropic layer. The retardation of the layer was observed at 633 nm by means of an ellipsometer (M150, JASCO), and found that the retardation values along the thickness direction ( $R_{th}$ ) and in the plane ( $R_e$ ) were 85 nm and 100 nm, respectively.

30

[Formation of first optically anisotropic layer]

On one surface of the second optically anisotropic layer, a gelatin layer was formed. The gelatin layer was then coated with the coating solution consisting of the

008260 04972960

following components to form an orientation layer of 0.5  $\mu\text{m}$  thickness.

---

5           Coating solution for orientation layer


---

The following denatured polyvinyl alcohol

		2 weight parts
10	Glutaric aldehyde	0.1 weight part
	Water	98 weight parts

---

Denatured polyvinyl alcohol

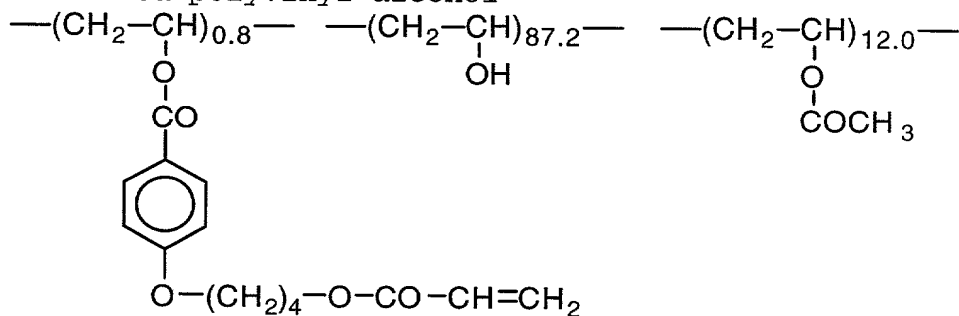

15

The formed orientation layer was then subjected to a rubbing treatment, and then coated with the coating solution consisting of the following components to form a first optically anisotropic layer (dry thickness: 1.5  $\mu\text{m}$ ).

20

---

Coating solution for first optically anisotropic layer

---

25


The following rod-like liquid crystal compound

30 weight parts

Methylene chloride

70 weight parts

Rod-like liquid crystal compound



The retardation of the layer was observed at 633 nm by means of an ellipsometer (M150, JASCO), and found that the retardation value along the thickness direction (Rth) was 100 nm and that the angle between the layer plane and the direction giving the minimum refractive index was 50°.

[Preparation of ellipsoidal polarizing plate]

Iodine was adsorbed onto a stretched polyvinyl alcohol film to prepare a polarizing membrane.

The above-produced optical compensatory sheet was laminated on one surface of the polarizing membrane with an adhesive of polyvinyl alcohol type. The second optically anisotropic layer of the compensatory sheet faces the polarizing membrane, and the direction giving the maximum refractive index in the second optically anisotropic layer was perpendicular to the transmission axis of the polarizing membrane.

On the other surface of the polarizing membrane, a triacetyl cellulose film (FUJI TAC, Fuji Photo Film Co., Ltd.) of 100 μm thickness was laminated as a transparent protective film with an adhesive of polyvinyl alcohol type. Thus, an ellipsoidal polarizing plate was prepared.

[Preparation of liquid crystal display]

On a glass plate having an ITO electrode, an orientation layer of polyimide was provided and subjected to a rubbing treatment. The procedure was repeated to prepare

two substrates, and the prepared substrates were then arranged face-to-face. The orientation layers were arranged inside, and the rubbing directions of the layers were perpendicular to each other. The cell gap was adjusted 4.5  $\mu\text{m}$  with a spacer. Between the plates, a liquid crystal compound (ZLI-4792, Merck & Co., Inc.) was introduced to prepare a rod-like liquid crystal layer.

Independently, two ellipsoidal polarizing plates were prepared in the above manner. On each surface of the above-prepared liquid crystal cell of a TN mode, each of the plates was laminated. The optically anisotropic layer faces the substrate. Thus, a liquid crystal display was prepared. In each side of the display, the rubbing direction of the orientation layer in the polarizing plate is reversely parallel to that of the neighboring orientation layer in the liquid crystal cell.

The prepared display gave an image of good contrast without reversing the gradation.

#### EXAMPLE 2

[Formation of second optically anisotropic layer]

The norbornene resin solution consisting of the following components was prepared, and then cast on a band casting machine to form a norbornene resin film (dry thickness: 100  $\mu\text{m}$ ).

---

Norbornene resin solution

---

Norbornene resin (Arton, JSR Co., Ltd.)

30 weight parts

Methylene chloride

70 weight parts

---

The prepared film was longitudinally stretched (real magnification:  $\times 1.3$ ), and then laterally stretched (real magnification:  $\times 1.15$ ) to form a second optically anisotropic layer. The retardation of the layer was observed at 633 nm by means of an ellipsometer (M150, JASCO), and found that the retardation values along the thickness direction ( $R_{th}$ ) and in the plane ( $R_e$ ) were 85 nm and 100 nm, respectively.

[Formation of first optically anisotropic layer]

After one surface of the second optically anisotropic layer was subjected to corona discharge treatment, an orientation layer and a first optically anisotropic layer were formed thereon in the same manner as Example 1. The optical properties are set forth in Table 1.

[Preparation of ellipsoidal polarizing plate]

Iodine was adsorbed onto a stretched polyvinyl alcohol film to prepare a polarizing membrane.

The above-produced optical compensatory sheet was laminated on one surface of the polarizing membrane with an adhesive of polyvinyl alcohol type. The second optically anisotropic layer of the compensatory sheet faces the polarizing membrane, and the direction giving the maximum refractive index in the second optically anisotropic layer was perpendicular to the transmission axis of the polarizing membrane.

On the other surface of the polarizing membrane, a triacetyl cellulose film (FUJI TAC, Fuji Photo Film Co., Ltd.) of 100  $\mu\text{m}$  thickness was laminated as a transparent protective film with an adhesive of polyvinyl alcohol type. Thus, an ellipsoidal polarizing plate was prepared.



[Preparation of liquid crystal display]

On a glass plate having an ITO electrode, an orientation layer of polyimide was provided and subjected to a rubbing treatment. The procedure was repeated to prepare two substrates, and the prepared substrates were then arranged face-to-face. The orientation layers were arranged inside, and the rubbing directions of the layers were perpendicular to each other. The cell gap was adjusted 4.5  $\mu\text{m}$  with a spacer. Between the substrates, a liquid crystal compound (ZLI-4792, Merck & Co., Inc.) was introduced to prepare a rod-like liquid crystal layer.

Independently, two ellipsoidal polarizing plates were prepared in the above manner. On each surface of the above-prepared liquid crystal cell of a TN mode, each of the plates was laminated. The optically anisotropic layer faces the substrate. Thus, a liquid crystal display was prepared. In each side of the display, the rubbing direction of the orientation layer in the polarizing plate is reversely parallel to that of the neighboring orientation layer in the liquid crystal cell.

The prepared display gave an image of good contrast without reversing the gradation.

### EXAMPLE 3

[Formation of second optically anisotropic layer]

A commercially available polycarbonate film (Teijin Limited) was longitudinally stretched (real magnification:  $\times 1.3$ ) to form a second optically anisotropic layer. The retardation of the layer was observed at 633 nm by means of an ellipsometer (M150, JASCO), and found that the retardation values along the thickness direction ( $R_{th}$ ) and in the plane ( $R_e$ ) were 100 nm and 150 nm, respectively.

[Formation of first optically anisotropic layer]

After one surface of the second optically anisotropic layer was subjected to corona discharge treatment, an orientation layer and a first optically anisotropic layer were formed thereon in the same manner as Example 1. The optical properties are set forth in Table 1.

[Preparation of ellipsoidal polarizing plate]

Iodine was adsorbed onto a stretched polyvinyl alcohol film to prepare a polarizing membrane.

The above-produced optical compensatory sheet was laminated on one surface of the polarizing membrane with an adhesive of polyvinyl alcohol type. The second optically anisotropic layer of the compensatory sheet faces the polarizing membrane, and the direction giving the maximum refractive index in the second optically anisotropic layer was perpendicular to the transmission axis of the polarizing membrane.

On the other surface of the polarizing membrane, a triacetyl cellulose film (FUJI TAC, Fuji Photo Film Co., Ltd.) of 100  $\mu\text{m}$  thickness was laminated as a transparent protective film with an adhesive of polyvinyl alcohol type. Thus, an ellipsoidal polarizing plate was prepared.

[Preparation of liquid crystal display]

On a glass plate having an ITO electrode, an orientation layer of polyimide was provided and subjected to a rubbing treatment. The procedure was repeated to prepare two substrates, and the prepared substrates were then arranged face-to-face. The orientation layers were arranged inside, and the rubbing directions of the layers were perpendicular to each other. The cell gap was adjusted 4.5  $\mu\text{m}$  with a spacer. Between them, a liquid crystal compound (ZLI-4792, Merck & Co., Inc.) was introduced to prepare a rod-like liquid crystal layer.

Independently, two ellipsoidal polarizing plates were prepared in the above manner. On each surface of the above-prepared liquid crystal cell of a TN mode, each of the plates was laminated. The optically anisotropic layer faces the substrate. Thus, a liquid crystal display was prepared. In each side of the display, the rubbing direction of the orientation layer in the polarizing plate is reversely parallel to that of the neighboring orientation layer in the liquid crystal cell.

The prepared display gave an image of good contrast without reversing the gradation.

#### EXAMPLE 4

##### [Formation of first optically anisotropic layer]

On one surface of the second optically anisotropic layer formed in Example 1, a coating solution comprising 1 weight part of photo-polymerizable oligomer (UN900PEP, Negami Industries Co., Ltd.), 19 weight parts of tetrahydrofuran and a little amount of benzophenone was applied and dried at 60°C for 30 minutes. A rod-like nematic liquid crystal compound (ZL14788-100, Merck & Co., Inc.) was further applied thereon. To align and fix the liquid crystal molecules, the applied compound was irradiated by UV light while a magnetic field of 5 kG was applied. The direction of the magnetic field had an angle of 70° with the normal of the coated surface in the plane where the normal and the direction perpendicular to the stretching direction of the second optically anisotropic layer were included. The optical properties are set forth in Table 1.

##### [Preparation of ellipsoidal polarizing plate]

Iodine was adsorbed onto a stretched polyvinyl alcohol film to prepare a polarizing membrane.

The above-produced optical compensatory sheet was laminated on one surface of the polarizing membrane with an adhesive of polyvinyl alcohol type. The second optically anisotropic layer of the compensatory sheet faces the polarizing membrane, and the direction giving the maximum refractive index in the second optically anisotropic layer was perpendicular to the transmission axis of the polarizing membrane.

On the other surface of the polarizing membrane, a triacetyl cellulose film (FUJI TAC, Fuji Photo Film Co., Ltd.) of 100  $\mu\text{m}$  thickness was laminated as a transparent protective film with an adhesive of polyvinyl alcohol type. Thus, an ellipsoidal polarizing plate was prepared.

[Preparation of liquid crystal display]

On a glass plate having an ITO electrode, an orientation layer of polyimide was provided and subjected to a rubbing treatment. The procedure was repeated to prepare two substrates, and the prepared substrates were then arranged face-to-face. The orientation layers were arranged inside, and the rubbing directions of the layers were perpendicular to each other. The cell gap was adjusted 4.5  $\mu\text{m}$  with a spacer. Between the substrates, a liquid crystal compound (ZLI-4792, Merck & Co., Inc.) was introduced to prepare a rod-like liquid crystal layer.

Independently, two ellipsoidal polarizing plates were prepared in the above manner. On each surface of the above-prepared liquid crystal cell of a TN mode, each of the plates was laminated. The optically anisotropic layer faces the substrate. Thus, a liquid crystal display was prepared. In each side of the display, the rubbing direction of the orientation layer in the polarizing plate is reversely parallel to that of the neighboring orientation layer in the liquid crystal cell.

The prepared display gave an image of good contrast without reversing the gradation.

EXAMPLE 5

5

[Formation of second optically anisotropic layer]

A triacetyl cellulose film (FUJI TAC, Fuji Photo Film Co., Ltd.) was used as a transparent support.

10 On one surface of the support, a gelatin layer was formed. The gelatin layer was then coated with the coating solution consisting of the following components to form an orientation layer of 0.5  $\mu$ m thickness.

15

---

Coating solution for orientation layer

---

20

Denatured polyvinyl alcohol (MP203, Kuraray Co., Ltd.)	2 weight parts
Glutaric aldehyde	0.1 weight part
Water	98 weight parts

---

25

The formed orientation layer was then subjected to a rubbing treatment, and then coated with the coating solution consisting of the following components to form a second optically anisotropic layer (dry thickness: 1.5  $\mu$ m).

---

Coating solution for second optically anisotropic layer

---

5

The rod-like liquid crystal compound used in the first optically anisotropic layer of Example 1

10	Methylene chloride	30 weight parts
		70 weight parts

---

The retardation of the layer was observed at 633 nm by means of an ellipsometer (M150, JASCO), and found that the retardation values along the thickness direction (Rth) and in the plane (Re) were 100 nm and 150 nm, respectively.

[Formation of first optically anisotropic layer]

On the other surface of the transparent support, a gelatin layer, an orientation layer and a first optically anisotropic layer were formed in the same manner as Example 1. The optical properties are set forth in Table 1.

[Preparation of ellipsoidal polarizing plate]

Iodine was adsorbed onto a stretched polyvinyl alcohol film to prepare a polarizing membrane.

The above-produced optical compensatory sheet was laminated on one surface of the polarizing membrane with an adhesive of polyvinyl alcohol type. The second optically anisotropic layer of the compensatory sheet faces the polarizing membrane, and the direction giving the maximum refractive index in the second optically anisotropic layer was perpendicular to the transmission axis of the polarizing membrane.

On the other surface of the polarizing membrane, a triacetyl cellulose film (FUJI TAC, Fuji Photo Film Co., Ltd.) of 100  $\mu\text{m}$  thickness was laminated as a transparent protective film with an adhesive of polyvinyl alcohol type.  
5 Thus, an ellipsoidal polarizing plate was prepared.

[Preparation of liquid crystal display]

On a glass plate having an ITO electrode, an orientation layer of polyimide was provided and subjected to a rubbing treatment. The procedure was repeated to prepare two substrates, and the prepared substrates were then arranged face-to-face. The orientation layers were arranged inside, and the rubbing directions of the layers were perpendicular to each other. The cell gap was adjusted 4.5  $\mu\text{m}$  with a spacer. Between them, a liquid crystal compound (ZLI-4792, Merck & Co., Inc.) was introduced to prepare a rod-like liquid crystal layer.  
10  
15

Independently, two ellipsoidal polarizing plates were prepared in the above manner. On each surface of the above-prepared liquid crystal cell of a TN mode, each of the plates was laminated. The optically anisotropic layer faces the substrate. Thus, a liquid crystal display was prepared. In each side of the display, the rubbing direction of the orientation layer in the polarizing plate is reversely parallel to that of the neighboring orientation layer in the liquid crystal cell.  
20  
25

The prepared display gave an image of good contrast without reversing the gradation.

003250"04974550

TABLE 1

Ellipsoidal polarizing plate	Angle of max- imum refrac- tive index of first layer	Angle of max- imum refrac- tive index of second layer	Angle of min- imum refrac- tive index of first and second layers
Example 1	45°	0°	50°
Example 2	45°	0°	50°
Example 3	35°	0°	60°
Example 4	55°	0°	40°
Example 5	25°	0°	70°

EXAMPLE 6

5

[Formation of second optically anisotropic layer]

The following components were placed in a mixing tank, and were stirred while heating to dissolve the components. Thus a cellulose acetate solution was prepared.

10

Cellulose acetate solution

15

Cellulose acetate (acetic acid content : 60.0%)

100 weight parts

Triphenyl phosphate (plasticizer) 7.8 weight parts

Biphenyldiphenyl phosphate (plasticizer)

3.9 weight parts



Methylene chloride (first solvent)

300 weight parts

Methanol (second solvent)

56 weight parts


n-Butanol (third solvent)

11 weight parts

5

10 In another mixing tank, 16 weight parts of the following retardation increasing agent, 80 weight parts of methylene chloride and 20 weight parts of methanol were placed, and the mixture was stirred while heating to prepare a retardation increasing agent solution.

Retardation increasing agent

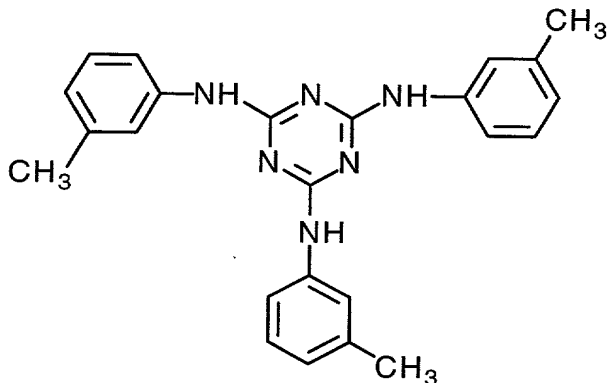

15

With 474 weight parts of cellulose acetate solution, 56 weight parts of the retardation increasing agent solution was added. The mixture was well stirred to prepare a dope.

20

The obtained dope was cast on a band casting machine. A film containing the remaining solvent in the amount of 15 wt.% was stretched by using a tenter at the stretching ratio of 35% along the cross direction to prepare a cellulose acetate film as a second optically anisotropic layer.

25

The retardation of the layer was observed at 550 nm by means of an ellipsometer (M150, JASCO), and found that the

retardation values along the thickness direction (Rth) and in the plane (Re) were 130 nm and 105 nm, respectively.

The second optically anisotropic layer was immersed in 1.5N aqueous solution of potassium hydroxide at 40°C for 5 minutes. The layer was neutralized with sulfuric acid, washed with pure water, and dried. The surface energy of the treated surface of the layer was 68 mN/m, which was measured according to a contact angle method.

10 [Formation of first optically anisotropic layer]

The following coating solution was coated on one surface of the second optically anisotropic layer by using a wire bar coater of #16. The coating amount was 28 ml per m<sup>2</sup>. The coated layer was air dried at 60°C for 60 seconds, and at 90°C for 150 seconds.

---

Coating solution for orientation layer

---

20

The denatured polyvinyl alcohol used in Example 1

10 weight parts

Water

371 weight parts

Methanol

119 weight parts

25

Glutaric aldehyde (cross-linking agent)

0.5 weight part

---

30 The formed orientation layer was then subjected to a rubbing treatment along a direction perpendicular to the slow axis (measured at the wavelength of 632.8 nm) of the second optically anisotropic layer.

The coating solution for the first optically anisotropic layer used in Example 1 was coated on the ori-

003250"0797560

entation layer to form a first optically anisotropic layer (dry thickness: 1.5  $\mu\text{m}$ ).

The retardation of the layer was observed at 633 nm by means of an ellipsometer (M150, JASCO), and found that the  
5 retardation value along the thickness direction ( $R_{th}$ ) was 100 nm and that the angle between the layer plane and the direction giving the minimum refractive index was  $50^\circ$ .

[Preparation of ellipsoidal polarizing plate]

10 Iodine was adsorbed onto a stretched polyvinyl alcohol film to prepare a polarizing membrane.

The above-produced optical compensatory sheet was laminated on one surface of the polarizing membrane with an adhesive of polyvinyl alcohol type. The second optically  
15 anisotropic layer of the compensatory sheet faces the polarizing membrane, and the direction giving the maximum refractive index in the second optically anisotropic layer was parallel to the transmission axis of the polarizing membrane.

20 On the other surface of the polarizing membrane, a triacetyl cellulose film (FUJI TAC, Fuji Photo Film Co., Ltd.) of 100  $\mu\text{m}$  thickness was laminated as a transparent protective film with an adhesive of polyvinyl alcohol type. Thus, an ellipsoidal polarizing plate was prepared.

25

[Preparation of liquid crystal display]

On a glass plate having an ITO electrode, an orientation layer of polyimide was provided and subjected to a rubbing treatment. The procedure was repeated to prepare  
30 two substrates, and the prepared substrates were then arranged face-to-face. The orientation layers were arranged inside, and the rubbing directions of the layers were perpendicular to each other. The cell gap was adjusted 4.5  $\mu\text{m}$  with a spacer. Between the substrates, a liquid crystal

002250" 0297/950

compound (ZLI-4792, Merck & Co., Inc.) was introduced to prepare a rod-like liquid crystal layer.

Independently, two ellipsoidal polarizing plates were prepared in the above manner. On each surface of the  
5 above-prepared liquid crystal cell of a TN mode, each of the plates was laminated. The optically anisotropic layer faces the substrate. Thus, a liquid crystal display was prepared. In each side of the display, the rubbing direc-  
10 tion of the orientation layer in the polarizing plate is reversely parallel to that of the neighboring orientation layer in the liquid crystal cell.

The prepared display gave an image of good contrast without reversing the gradation.

Claims:

008260" 049T4950

1. An ellipsoidal polarizing plate comprising a first optically anisotropic layer, a second optically  
5 anisotropic layer, a polarizing membrane and a transparent protective film, wherein the first optically anisotropic layer has an angel of  $5^{\circ}$  to  $85^{\circ}$  between the direction giving the maximum refractive index and the layer plane, and wherein the second optically anisotropic layer is optically  
10 positive and uniaxial, and the second optically anisotropic layer has an angel of  $0^{\circ}$  to  $5^{\circ}$  between the direction giving the maximum refractive index and the layer plane.

2. The ellipsoidal polarizing plate as defined in  
15 claim 1, wherein the first optically anisotropic layer comprises rod-like liquid crystal molecules.

3. The ellipsoidal polarizing plate as defined in  
20 claim 2, wherein the rod-like liquid crystal molecules are so aligned in the first optically anisotropic layer that an inclined angle of each rod-like liquid crystal molecule varies according to the distances between the molecule and the surface of the second optically anisotropic layer.

25 4. The ellipsoidal polarizing plate as defined in claim 1, wherein the second optically anisotropic layer is a uniaxially stretched polymer film.

30 5. The ellipsoidal polarizing plate as defined in claim 1, wherein the second optically anisotropic layer is a uniaxially stretched cellulose ester film.

6. The ellipsoidal polarizing plate as defined in claim 1, wherein the first and second optically anisotropic layers are so arranged that the projection of the direction giving the maximum refractive index in the first optically  
5 anisotropic layer onto the layer plane is essentially perpendicular, on the same plane, to the direction giving the maximum refractive index in the second optically anisotropic layer.

10 7. The ellipsoidal polarizing plate as defined in claim 1, wherein the plate comprises the first optically anisotropic layer, the second optically anisotropic layer, the polarizing membrane and the transparent protective film in this order.

15 8. The ellipsoidal polarizing plate as defined in claim 1, wherein the second optically anisotropic layer and the polarizing membrane are so arranged that the direction giving the maximum refractive index in the second optically  
20 anisotropic layer is essentially perpendicular to the transmission axis of the polarizing membrane.

25 9. The ellipsoidal polarizing plate as defined in claim 1, wherein the second optically anisotropic layer and the polarizing membrane are so arranged that the direction giving the maximum refractive index in the second optically anisotropic layer is essentially parallel to the transmission axis of the polarizing membrane.

10. A liquid crystal display comprising a liquid crystal cell of TN mode and two polarizing elements arranged on both sides of the liquid crystal cell, wherein at least one of the polarizing elements is an ellipsoidal polarizing plate comprising a first optically anisotropic layer, a second optically anisotropic layer, a polarizing membrane and a transparent protective film, wherein the first optically anisotropic layer has an angel of  $5^{\circ}$  to  $85^{\circ}$  between the direction giving the maximum refractive index and the layer plane, and wherein the second optically anisotropic layer is optically positive and uniaxial, and the second optically anisotropic layer has an angel of  $0^{\circ}$  to  $5^{\circ}$  between the direction giving the maximum refractive index and the layer plane.

15

002250" 0/9T/950

ABSTRACT OF THE DISCLOSURE

An ellipsoidal polarizing plate comprises two optically anisotropic layers, a polarizing membrane and a transparent protective film. One of the optically anisotropic layers has an angel of  $5^{\circ}$  to  $85^{\circ}$  between the direction giving the maximum refractive index and the layer plane. The other is optically positive and uniaxial, and has an angel of  $0^{\circ}$  to  $5^{\circ}$  between the direction giving the maximum refractive index and the layer plane.

09674670-092200



FIG. 1

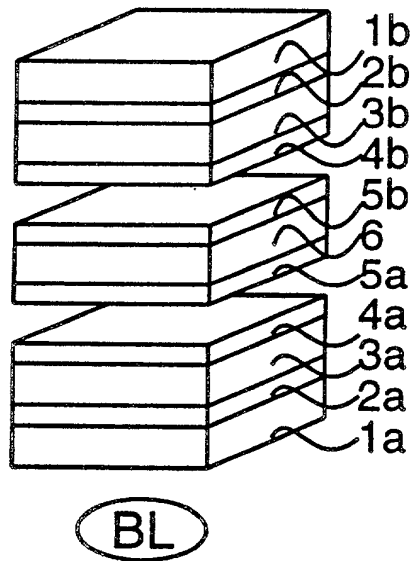


FIG. 2


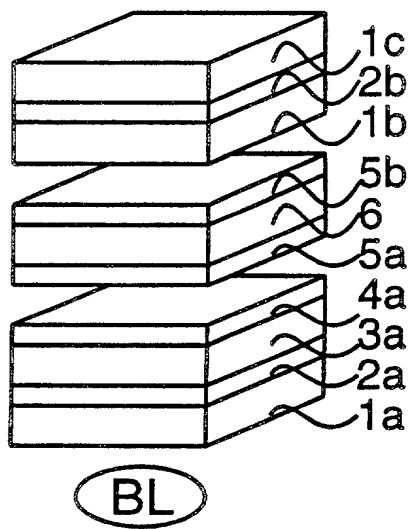


FIG. 3

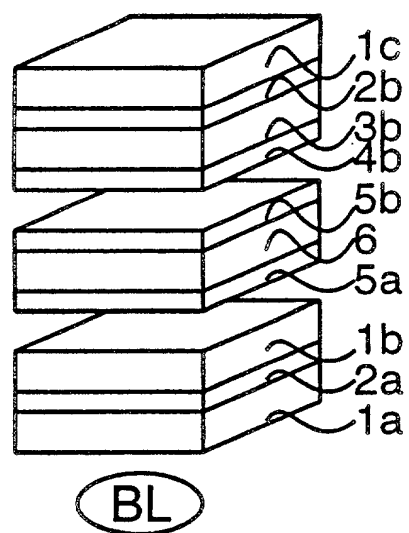

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR UTILITY PATENT APPLICATION

Attorney's Docket No.

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I BELIEVE I AM THE ORIGINAL, FIRST AND SOLE INVENTOR (if only one name is listed below) OR AN ORIGINAL, FIRST AND JOINT INVENTOR (if more than one name is listed below) OF THE SUBJECT MATTER WHICH IS CLAIMED AND FOR WHICH A PATENT IS SOUGHT ON THE INVENTION ENTITLED:

ELLIPSOIDAL POLARIZING PLATE COMPRISING TWO OPTICALLY

ANISOTROPIC LAYERS AND POLARIZING MEMBRANE

the specification of which

(check one)

☒

is attached hereto;

☐

was filed on \_\_\_\_\_ as

Application No. \_\_\_\_\_

and was amended on \_\_\_\_\_;  
(if applicable)

I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION, INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE;

I ACKNOWLEDGE THE DUTY TO DISCLOSE TO THE OFFICE ALL INFORMATION KNOWN TO ME TO BE MATERIAL TO PATENTABILITY AS DEFINED IN TITLE 37, CODE OF FEDERAL REGULATIONS, Sec. 1.56 (as amended effective March 16, 1992);

I do not know and do not believe the said invention was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to said application; that said invention was not in public use or on sale in the United States of America more than one year prior to said application; that said invention has not been patented or made the subject of an inventor's certificate issued before the date of said application in any country foreign to the United States of America on any application filed by me or my legal representatives or assigns more than twelve months prior to said application;

I hereby claim foreign priority benefits under Title 35, United States Code Sec. 119 and/or Sec. 365 of any foreign application(s) for patent or inventor's certificate as indicated below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application(s) on which priority is claimed:

008260" 04972560

COMBINED DECLARATION AND POWER OF ATTORNEY			Attorney's Docket No.
COUNTRY/INTERNATIONAL	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED
Japan	11-280705	30,09,1999	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

William L. Mathis	17,337	R. Danny Huntington	27,903	Gerald F. Swiss	30,113
Robert S. Swecker	19,885	Eric H. Weisblatt	30,505	Michael J. Ure	33,089
Platon N. Mandros	22,124	James W. Peterson	26,057	Charles F. Wieland III	33,096
Benton S. Duffett, Jr.	22,030	Teresa Stanek Rea	30,427	Bruce T. Wieder	33,815
Norman H. Stepno	22,716	Robert E. Krebs	25,885	Todd R. Walters	34,040
Ronald L. Grudziecki	24,970	William C. Rowland	30,888	Ronni S. Jillions	31,979
Frederick G. Michaud, Jr.	26,003	T. Gene Dillahunty	25,423	Harold R. Brown III	36,341
Alan E. Kopecki	25,813	Patrick C. Keane	32,858	Allen R. Baum	36,086
Regis E. Slutter	26,999	Bruce J. Boggs, Jr.	32,344	Steven M. du Bois	35,023
Samuel C. Miller III	27,360	William H. Benz	25,952	Brian P. O'Shaughnessy	32,747
Robert G. Mukai	28,531	Peter K. Skiff	31,917		
George A. Hovanec, Jr.	28,223	Richard J. McGrath	29,195		
James A. LaBarre	28,632	Matthew L. Schneider	32,814		
E. Joseph Gess	28,510	Michael G. Savage	32,596		

and: \_\_\_\_\_

Address all correspondence to: **Platon N. Mandros**  
**BURNS, DOANE, SWECKER & MATHIS, L.L.P.**  
**P.O. Box 1404**  
**Alexandria, Virginia 22313-1404**

Address all telephone calls to: Platon N. Mandros at (703) 836-6620.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Yoji Ito	SIGNATURE <i>Yoji Ito</i>	DATE 01,09,2000
RESIDENCE Minami-ashigara-shi, Kanagawa, Japan	CITIZENSHIP Japan	
POST OFFICE ADDRESS c/o Fuji Photo Film Co., Ltd., No. 210, Nakanuma, Minami-ashigara-shi, Kanagawa, 250-0123 Japan		
FULL NAME OF SECOND JOINT INVENTOR, IF ANY	SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		
FULL NAME OF THIRD JOINT INVENTOR, IF ANY	SIGNATURE	DATE
RESIDENCE	CITIZENSHIP	
POST OFFICE ADDRESS		